



**TRUE FOOD SERVICE EQUIPMENT, INC.**

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366  
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: \_\_\_\_\_

AIA #

Location: \_\_\_\_\_

SIS #

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model #: \_\_\_\_\_

**Specification Series**

**TG-Series - Dual Temperature Reach-In Refrigerator/Freezer**

**Dual Temperature Reach-In Refrigerator/Freezer**

**TG2DT-2S**



**TG2DT-2S**

*True introduces its latest offering designed specifically to meet the needs of consultants.*

**SPECIFICATIONS / FEATURES**

**DOORS:**

- 300 series stainless steel exterior with 300 series stainless steel interior door liner. Doors extend full width of cabinet shell. Door gaskets of one piece construction.
- Lifetime guaranteed adjustable torsion type closure system with extruded aluminum and stainless steel supports. The face of each door fitted with a 12" long recessed handle with interlock (lifetime guarantee on all handles and door hardware). Handles are foamed-in-place to insure permanent attachment.

**INSULATION:**

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

**SHELVING:**

- (3) heavy duty, vinyl coated wire shelves per section (shipped separately). (3) different interior kits available. See "optional accessories" section. (field installation required).
- Optional interior kit must be indicated at time of order. Note: Tray slide sets and shelves can also be ordered individually.
- Standard backguard in freezer compartment improves airflow.

**LIGHTING:**

- Compartmentalized, incandescent interior lighting (one for each door). Lights activated by rocker switch mounted above door(s).

**REFRIGERATION SYSTEM:**

- Two independent, self-contained refrigeration systems CFC free environmentally friendly and factory balanced. 134A refrigerator (left side) refrigerant - R404A freezer (right side) refrigerant.

- Top mounted condensing unit.

- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F (refrigerator) and -10°F (freezer) interior cabinet temperature.

- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

**ELECTRICAL CHARACTERISTICS:**

- Unit completely pre-wired at factory, and ready for final connection. A cord and plug set to be included.

- A sole use circuit is required.

**SPECIFICATIONS / FEATURES**

**CABINET CONSTRUCTION:**

- Exterior - 300 series stainless steel front, shroud, doors & bottom. Anodized quality aluminum finished ends, top and back.
- Interior - NSF approved, white vinyl coated aluminum interior side walls and back. 300 series stainless steel interior door liner and 300 series stainless steel floor. Construction of liner in accordance with NSF standards.
- Barrel lock standard for each door. Locks keyed alike.
- Dual, digital exterior temperature monitors with manual defogger control, large LED display for quick and easy temperature identification.
- Cabinet mounted on a welded, galvanized frame rail, enamel dipped and baked for permanent bond on all surfaces, provides additional corrosion protection. Frame rail fitted with 4" diameter polyolefin castors, (front castors include brakes).



115/208-230/1  
NEMA 14-20

Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.

Curb mountable units for TR/TA/TG series only. (5% list upcharge)

Specifications subject to change without notice.

Printed in U.S.A.




**APPROVALS:**

10/03

Exceptions:



# TG-Series: Dual Temperature Reach-In Refrigerator/Freezer

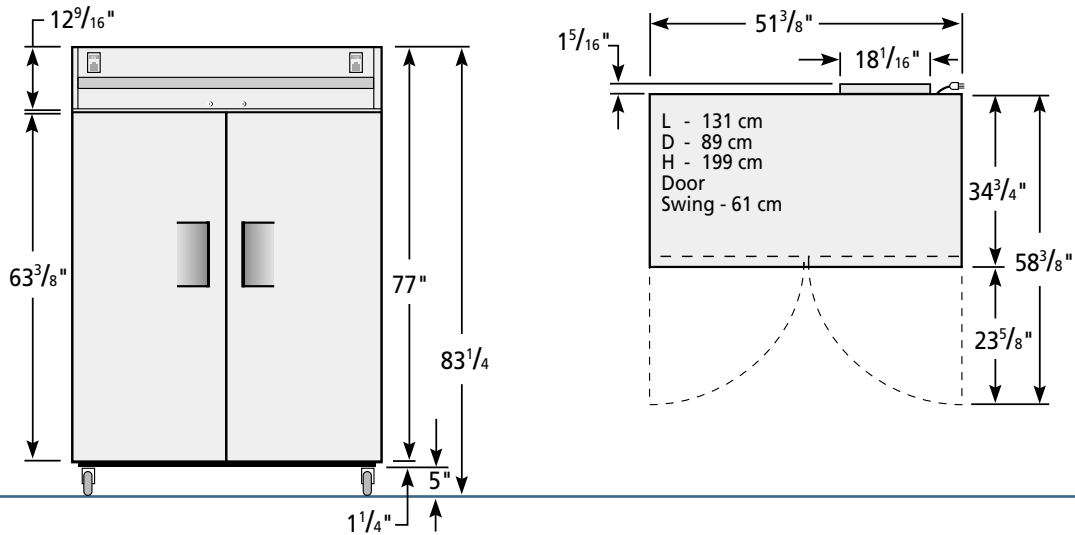

## Rough-In Data

Model	Swing Doors	Capacity (Cu. Ft)		Dimensions (inches)			HP		Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
		Ref.	Frzr	L	D†	H*	Ref.	Freezer						
TG2DT-2S	2	26	24	51 3/8	34 3/4	78 1/4	1/3	1/2	115/208/230	1	12.2	14-20	9	725

Requires 115/208-230/60 Hz, single phase, 3 pole, 4 wire.

\* Height does not include 5" for castors or 6" for optional legs.

† Depth does not include 1 5/16" for upper rear condensate enclosure.

Specifications subject to change without notice.

## Standard Features

- Two, independent, self-contained, oversized and balanced, environmentally friendly refrigeration systems (refrigerator 134A; freezer R404A) - left side refrigerator holds 33°F to 38°F; right side freezer holds -10°F.
- Exterior - 300 series stainless steel front, doors & bottom. Anodized quality aluminum finished ends, back & top.
- Interior - NSF approved, white vinyl coated aluminum sides. 300 series stainless floor and door liner.
- Recessed handles (lifetime guaranteed).
- Door locks standard.
- Two exterior mounted digital electronic thermometers with manual defogger.
- Single power cord for two compressors.
- Foamed-in-place polyurethane high density cell insulation (CFC free).
- Standard backguard - improves airflow in freezer compartment.
- (3) heavy duty, vinyl coated shelves per section (shipped separately) (3) different interior kits available. Kit selection must be indicated at time of order. (field installation required).
- Epoxy coated evaporator.
- Compartmentalized, Incandescent interior lighting (one for each door).
- 4" diameter swivel castors standard equipment - locking castors provided for front set.
- Hot gas condensate for energy efficiency.
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system.
- Top mounted unit positioned out of food zone to maximize storage capacity.
- Self-contained system.
- 1 year parts and labor warranty (USA).
- 5 year compressor warranty (USA).

## Optional Accessories

- 6" stainless steel legs.
- Seismic/Flanged legs.
- Kit #1 (9 sets of #1 type tray slides).
- Kit #2 (rod type 1 set covers 1/2 section).
- Kit #3 (6 sets of universal type tray slides).
- Kit #4 (3 chrome shelves and shelf supports)
- Stainless steel (electro polished) shelves.
- Chrome shelves.
- Metal handle (solid doors only).
- Cam lift hinge (solid door models only).
- Electronic temperature control.
- Universal pan slides.
- #1 pan slides.
- #2 or rod style pan slides.
- Curb mountable units.
- Export units available - consult factory.
- Correctional facility options - consult factory.
- Remote cabinets available (contact factory technical services for BTU information).

KCL	Model	Front	Right	Plan	3D
	TG2DT-2S	TFQY93E	TFQY54S	TFQY93P	TFQY933

## TRUE FOOD SERVICE EQUIPMENT

